

DAFA vapour barrier tape

DAFA vapour barrier tape is a part of DAFA AirStop System and is a strong adhesive tape for bonding vapour barrier foils.

DAFA AirStop System® is a registered trademark in the EU



DAFA offers a function and product warranty for 10 years on all products associated with DAFA AirStop System.


Insured by 

DAFA vapour barrier tape for the indoor bonding of all PP/PE membrane types, as well as plywood, chipboard, planed timber and metal.

DAFA vapour barrier tape meets the stricter requirements of the new building regulations for the bonding of vapour barrier foil, approved in accordance with DS/EN 13984.

NOTE: DAFA vapour barrier tape should not be used in structures where the joints are subject to constant pressure from insulation or similar until the final ceiling or wall cladding has been fully installed, as there is a risk of the tape sliding within the joint.

Read more at www.dafa-as.com

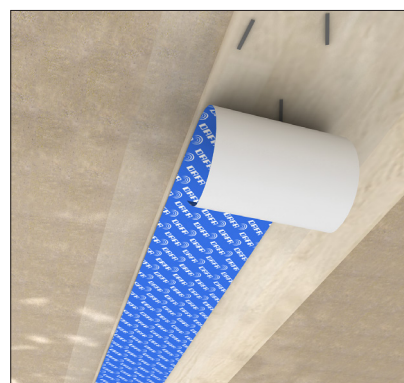


Benefits of the green tape

- Suitable for pipe conduits
- Flexible / extensible
- Strong adhesive properties

Benefits of the blue tape

- Suitable for the longitudinal and transverse bonding of membranes.
- DAFA vapour barrier tape can easily be shortened without the need for any tools.
- Strong adhesive properties.

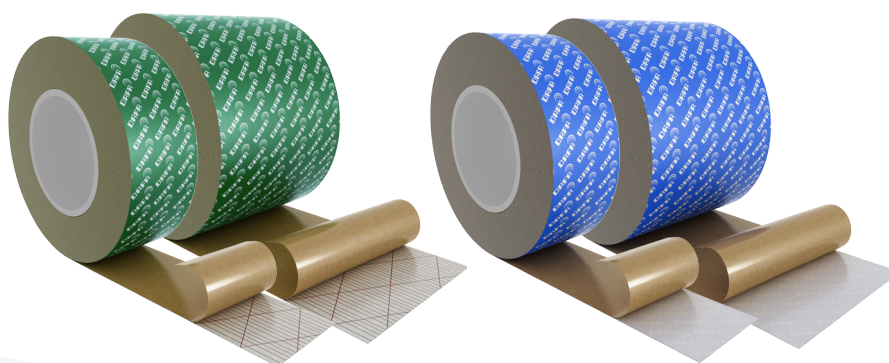

DAFA vapour barrier tape is a tape with strong adhesive properties that should only be used for permanent application as the tape cannot be removed from the surface.

Colour / dim.	Contents per box	DAFA item no.	EAN no.
GREEN 50 mm	12 rolls of 25 m	620006596	5705636284484
BLUE 50 mm	12 rolls of 25 m	620005987	5705636266459
GREEN 100 mm	6 rolls of 25 m	620023654	5705636404110
BLUE 100 mm	6 rolls of 25 m	620014093	5705636341699

Technical specifications

DAFA vapour barrier tape is a single-sided tape for overlapping vapour barriers. Modified acrylic adhesive, solvent-free and water-based. The strength of the adhesive has been gradually improved over time and is highly resistant to moisture and other atmospheric fluctuations. Excellent tack value, adheres very well to PE / PP foil as well as rough surfaces such as chipboard. The tape is expected to last a minimum of 20 years.

	GREEN vapour barrier tape	BLUE vapour barrier tape
Thickness	Foil + adhesive 280 / 300 my 0,31mm	Paper + adhesive 330 / 350 my 0,34 mm
Grammage	Adhesive 240 g / m ²	Adhesive 260 g / m ²
Peel value	AFERA 5001, 30 N / 25 mm	AFERA 5001, 30 N / 25 mm
Installation	Surfaces must be dry and free of dust and oil. From -10 °C	
Temperature resistance	-30 °C - +120 °C	-30 °C - +120 °C